


Specification for terraces / balconies

Terraces and balconies

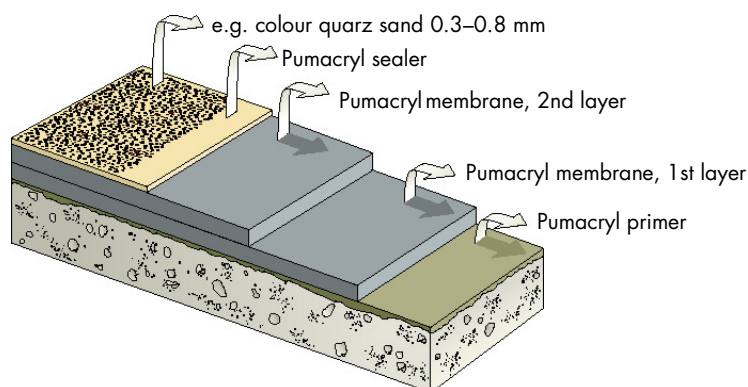

Primer

On concrete / screed:	PUMACRYL PRIMER or PRIMER H	approx. 0.3 kg/m ²
On asphalt (*):	PUMACRYL MEMBRANE	approx. 1.0 kg/m ²
On metal / tiles:	PUMACRYL PRIMER CM	approx. 0.25 kg/m ²
On timber:	PUMACRYL PRIMER	approx. 0.3 kg/m ²

(*) low tar content

Low density required

Wearing layer:	PUMACRYL MEMBRANE	2.0 kg/m ²
Filler:	Quartz sand 0.1-0.4 mm	1.4 kg/m ²
Broadcasting:	Colour quartz sand 0.3-0.8 mm	4-5 kg/m ²
Sealer:	PUMACRYL STC 307	0.5 kg/m ²

High density required

On top of primer: membrane layer:	PUMACRYL MEMBRANE	2.5 kg/m ²
Wearing layer:	PUMACRYL MEMBRANE	2.0 kg/m ²
Filler:	Quartz sand 0.1-0.4 mm	1.4 kg/m ²
Broadcasting:	Colour quartz sand 0.3-0.8 mm	4-5 kg/m ²
Sealer:	PUMACRYL STC 307	0.5 kg/m ²

The consumption depends on porosity and structure of the substrate.

The consumptions are valid for an application at +20 °C.

For details please refer to respective technical data sheet of each product.

HEADOFFICE AND INTERNATIONAL SALES:

Vandex International Ltd
P.O. Box, CH-4501 Solothurn/Switzerland
Phone +41 32 626 36 36, Fax +41 32 626 36 37
info@vandex.com www.vandex.com

PRODUCTION AND SALES GERMANY / AUSTRIA:

Vandex Isoliermittel GmbH
P.P. Box 1406, D-21493 Schwarzenbek / Germany
Phone +49 4151 89 50-0, Fax +49 4151 89 15 50
info@vandex.de www.vandex.de