


### Specification underneath screed

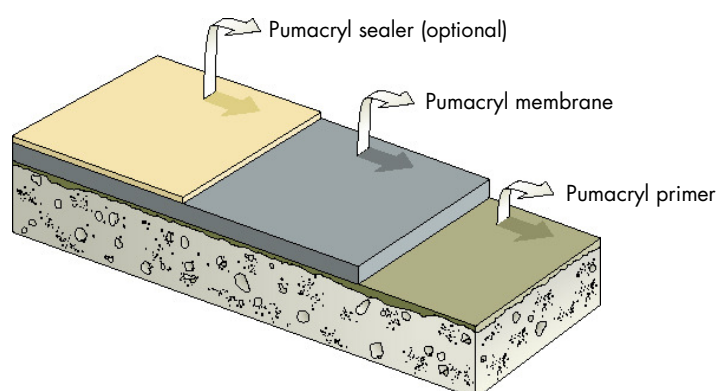

#### Primer

	PUMACRYL PRIMER	approx. 0.3 kg/m <sup>2</sup>
--	-----------------	-------------------------------

#### Membrane

On top of primer:	PUMACRYL MEMBRANE	2.0 kg/m <sup>2</sup>
-------------------	-------------------	-----------------------

#### Optional: sealer for surface protection

On top of membrane:	PUMACRYL STC 307	0.35 kg/m <sup>2</sup>
Broadcasting:	Quartz sand (0.3–0.7 mm)	1.0 kg/m <sup>2</sup>

The consumption depends on porosity and structure of the substrate.

The consumptions are valid for an application at +20 °C.

For details please refer to respective technical data sheet of each product.

#### HEADOFFICE AND INTERNATIONAL SALES:

Vandex International Ltd  
P.O. Box, CH-4501 Solothurn/Switzerland  
Phone +41 32 626 36 36, Fax +41 32 626 36 37  
info@vandex.com www.vandex.com

#### PRODUCTION AND SALES GERMANY / AUSTRIA:

Vandex Isoliermittel GmbH  
P.P. Box 1406, D-21493 Schwarzenbek / Germany  
Phone +49 4151 89 50-0, Fax +49 4151 89 15 50  
info@vandex.de www.vandex.de