


POTABLE WATER TREATMENT PLANT – REFURBISHMENT

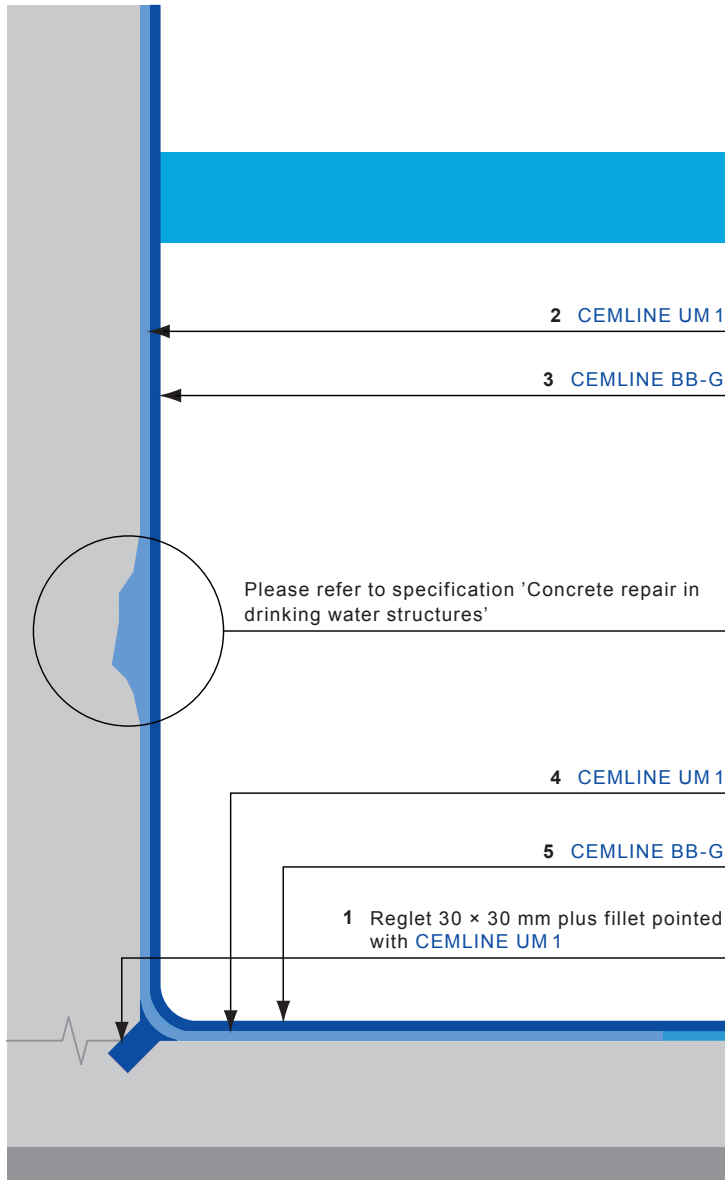

Application Instructions

1 Optional: Chisel out a reglet (approx. 30 × 30 mm) along construction joints. Point the reglet and form a fillet with a suitable mortar, preferably with CEMLINE UM 1.

Vertical surfaces:

2 Apply one layer of CEMLINE UM 1 as surface leveller, also to increase concrete cover to reinforcement.

3 Apply two coats of CEMLINE BB-G as final lining.

Horizontal surfaces:

4 Apply one layer of CEMLINE UM 1 as surface leveller, also to increase concrete cover to reinforcement.

5 Apply two coats of CEMLINE BB-G as final lining.

Alternative:

- Where an increased aesthetic quality is required, replace CEMLINE BB-G by CEMLINE BB-W.

Remark:

- Substrate adhesion strength > 1.5 N/mm²

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.